DIE-CAST ALUMINUM FLIP-TOP CONNECTION HEADS

The 49 series flip-top aluminum connection heads listed below meet NEMA 4 requirements for indoor or outdoor applications. The 49 series flip-top aluminum head utilize an EPDM O-ring seal with a maximum temperature rating of 400 ºF. The flip cover provides easy access to the terminals for wiring or maintenance. These connection heads accept the Pyromation 340 series terminal blocks, 400 series transmitters, and DIN Form B blocks and transmitters.



Example Order Number: 1-1 **49C** - 1-2 **GS** - 1-3 **343-3**

1-1 General-Purpose Aluminum Flip-Top

ORDER CODE	DESCRIPTION		
	Process Opening	*Conduit Opening*	*Standard Gasket*
49C	1/2" NPT	3/4" NPT	EPDM O-ring
49D	3/4" NPT	3/4" NPT	EPDM O-ring

1-2 Head Options

ORDER CODE	DESCRIPTION
GS	Internal ground screw

1-3 Terminal Blocks

ORDER CODE	DESCRIPTION	CONDUCTOR SIZE
341	Single terminal block	Up to 8 AWG
342	Duplex terminal block	Up to 8 AWG
343-2	Triplex terminal block with 2 brass terminals	Up to 12 AWG
343-3	Triplex terminal block with 3 brass terminals	Up to 12 AWG
343-4	Triplex terminal block with 4 brass terminals	Up to 12 AWG
343-6	Triplex terminal block with 6 brass terminals	Up to 12 AWG

MINIATURE NICKEL-PLATED STEEL CONNECTION HEADS

The miniature nickel-plated connection heads listed below are for indoor or outdoor non-hazardous locations. They provide some degree of protection from dust, rain, and splashing water. The heads come standard with an O-ring moisture seal where the cap connects to the body, and a rubber grommet where the wire exits the cap. The nickel plating provides good corrosion protection. The 362 series connection heads are available with a 1/8" NPT or 1/4" NPT process connections, along with 2-, 3-, or 4-terminal configurations.



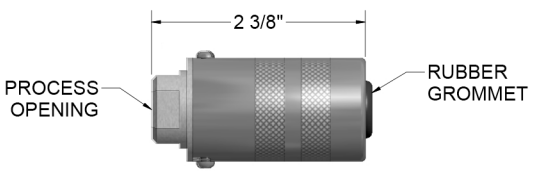

Example Order Number: 1-1 **364A**

1-1 Complete Head Assemblies

CODE	NO. OF TERMINALS	PROCESS OPENING (inches)	CODE	NO. OF TERMINALS	PROCESS OPENING (inches)
362A	2	1/8 NPT	362B	2	1/4 NPT
363A	3	1/8 NPT	363B	3	1/4 NPT
364A	4	1/8 NPT	364B	4	1/4 NPT