



Limited-Space Thermowells are available in a variety of materials and process connection sizes. Thermowell specifications should be determined based on process conditions which include strength, temperature, pressure and corrosion-resistance requirements. They are intended for use in piping systems where space is limited. They are designed with a standard 0.260" bore diameter to accommodate sensing elements with a 0.252" maximum diameter. These wells are available as separate components or as part of complete sensor assemblies.

3/4" and 1" NPT

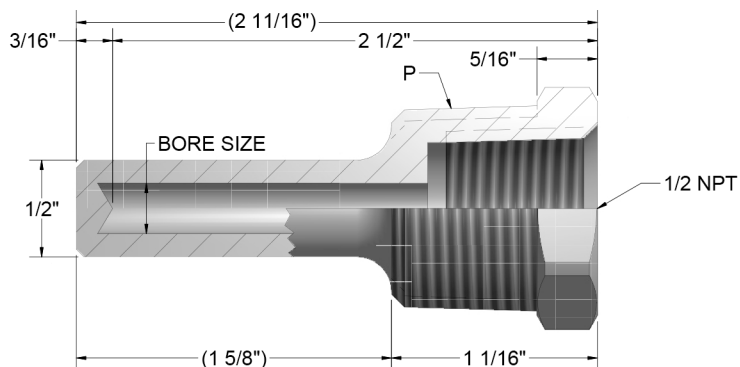

1/2" NPT

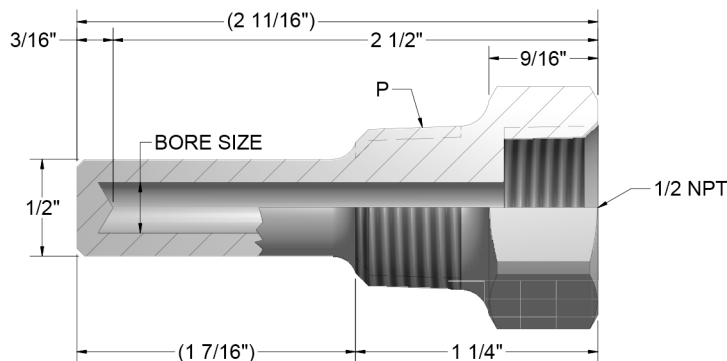

ORDER CODES

Example Order Number:

| 1-0 | 1-1 | 1-2 | 1-3 | 1-4 |
|-----------|----------|----------|------------|--------------|
| LS | 4 | D | 2.5 | 08 C8 |

1-0 Well Type

| CODE | DESCRIPTION |
|------|------------------------|
| LS | Limited-space threaded |

1-1 Bore Size

| CODE | DESCRIPTION |
|------|------------------|
| 4 | 0.260" Dia. bore |

1-2 Pipe Size "P"

| CODE | DESCRIPTION |
|------|-------------|
| C | 1/2" NPT |
| D | 3/4" NPT |
| E | 1" NPT |

1-4 Options

| CODE | DESCRIPTION |
|------|--|
| C8 | 316 stainless steel well cap and chain |
| C22 | Brass well cap and chain |
| S | Well stamped with customer-specified part number |

1-3 Material

| CODE | DESCRIPTION |
|------|---|
| XX | Specify two digit material code as stated in the Thermowell Material Table located earlier in section |